

When properly installed, the reusable peak roofing anchors provides a safe anchorage point for personal fall arrest system with a minimum breaking strength of 5,000 lbs. (22.2 kN).

The reusable peak roofing anchors is design for ease of installation on any roof peak angle. The hinged D-ring ensures correct alignment of the lifeline connector minimizing the risk of cross loading.

It is supplied with 12 screws #12 x 2⁷/₈ in. (73 mm) with #3 Phillips pan head.

⚠ WARNING


Always select an anchorage point that is capable of supporting 5,000 lbs. (22.2 kN).

APPLICABLE STANDARDS


- Manufactured in accordance with ANSI, OSHA and CSA requirements.
- Meets and/or exceeds 5,000 lbs. (22.2 kN) strength requirements for anchorage point.

AVAILABLE MODEL

- **N105B** Box of 5 reusable peak roofing anchors with screws

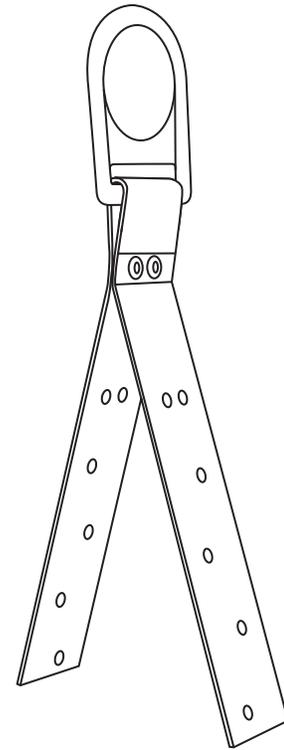

SPECIFICATIONS	
CONSTRUCTION	Stamped steel
MINIMUM BREAKING STRENGTH	5,000 lbs. (22.2 kN)
D-RING	Proof-loaded 100% at 3,600 lbs. (16 kN) Tensile strength: 5,000 lbs. (22.2 kN)
CAPACITY	385 lbs. (175 kg), one person

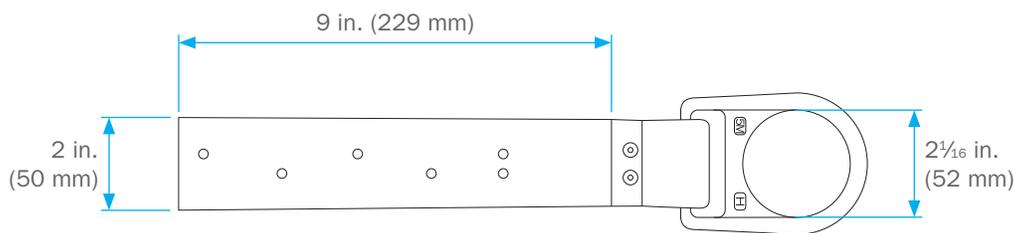

Specifications are subject to change without notice. Images are for illustrative purposes only.